

 **First in Quality. Built to Last.**



AUTO L-SEALER

VALUE SERIES

MODELS

VSA1825

PROVEN RELIABILITY

Proven reliable over and over again, Eastey's VSA1825 Auto L-Sealer will handle the day to day operation required for automatic sealing and provide you with all the quality features found in much higher priced machines. They are designed and built to give you the performance needed for positive sealing a wide variety of polyolefin shrink films.

EFFICIENT DESIGN

Eastey's VSA1825 is designed specifically for automatic L-sealing applications that require simple operation and a small footprint. Products are automatically fed into the VSA1825 where a product sensor detects the product as it moves into the sealing area. Once in position, a 90° guillotine hot knife seal bar automatically seals the film edges to create a loose bag around the product.

RELIABLE AUTOMATIC L-SEALING

EASTEY Value Series Automatic L-Sealers offer the durability of functionality needed to handle a variety of applications efficiently.



Once sealed, the product transfers to a heat tunnel to shrink the film and provide a clean, finished product. The efficient automatic seal system allows users to seal between 35 - 40 products per minute, depending on the product size and application requirements.

STANDARD FEATURES

- Designed to seal polyolefin shrink films
- Adjustable pin perforators provide air evacuation
- Infeed and outfeed conveyors run at 100 f/min (30.5 m/min)
- Motorized seal height adjustment to center seal line for various product sizes
- Seal head equipped with pneumatic air cylinder for automatic sealing
- PTFE hot knife seal bar with vertical cutting motion for consistent and clean seal
- Consistent pressure across seal bar
- Automatic cycle timing with adjustable dwell time
- 7" color touchscreen controller for user interface and system setup
- Film tracking wheels keep film in place; scrap film take-up wheel included
- Heavy duty casters and leveling pads for transportation within plant
- Easy to use design requires minimal training and maintenance
- 18"W x 25"L seal area for packages up to 7" tall
- Maximum film width up to 24"
- Maximum film roll OD up to 12"
- 60 - 80 PSI, 1/4" NPT fitting
- CE Certification



*VSA1825 & VST1710

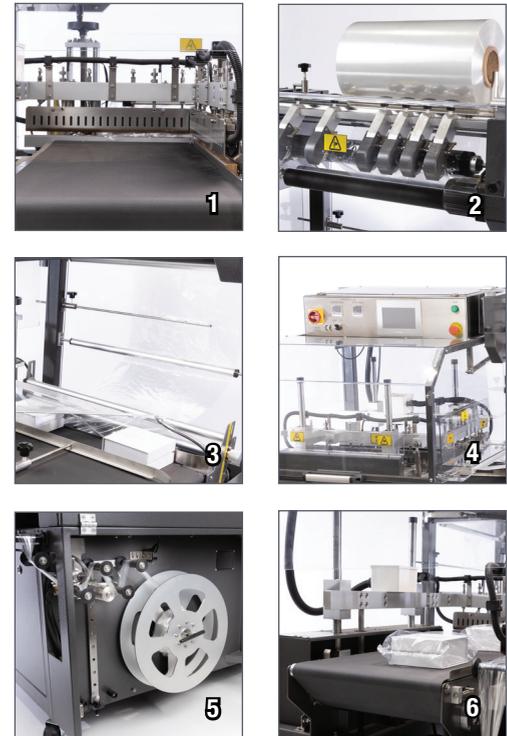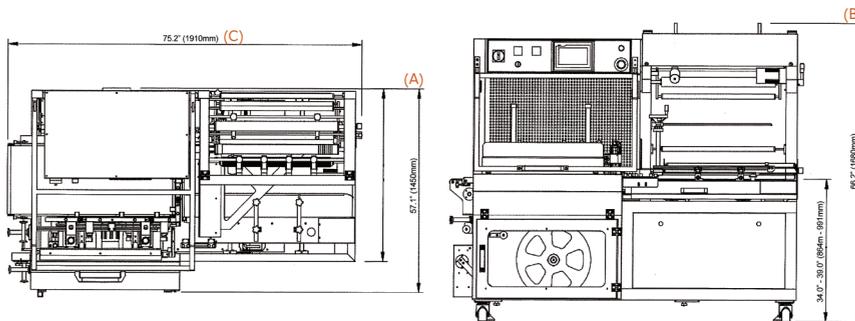

1. **Hot Knife Seal Bar**
Vertical cutting motion with PTFE hot knife delivers a consistent seal every time
2. **Multiple Pin Perforators**
Adjustable pin perforators provide air evacuation during the shrink process
3. **Film Inverter**
Opens film to create a loose bag around the product
4. **7" Color Touchscreen**
User interface features simple menus for easy operation and adjustments required for a variety of applications
5. **Scrap Wind Roller**
Take-up wheel for safe and convenient removal of scrap film
6. **Exit Conveyor**
Provides a smooth transition from the sealer to the shrink tunnel

TECHNICAL SPECIFICATIONS

Model Number	VSA1825
Machine Dimensions	WIDTH (A) - 57.1" (1450mm) HEIGHT (B) - 66.2" (1680mm) LENGTH (C) - 75.2" (1910mm)
Product Size	LENGTH MIN - 2.5" (64mm); LENGTH MAX - 22.0" (559mm) WIDTH MIN - 2.5" (64mm); WIDTH MAX - 16.0" (406mm) HEIGHT MIN - .2" (5mm); HEIGHT MAX - 7.0" (178mm)
Film Width	24.0" (610mm)
Conveyor Height	34.0" - 39.0" (864mm - 991mm)
Standard Power	Volts - 220 Amps - 12 Phase - 1
Weight	1,390 lbs (630kg)
Ship Weight	1,490 lbs (676kg)

OPTIONAL ACCESSORIES

Infeed Conveyor	Connects directly to the VSA1825 and allows users to choke feed products into the Auto L-bar sealer
-----------------	---



7041 Boone Avenue North, Brooklyn Park, MN 55428
(763) 428-4846 1 (800) 835-9344
www.eastey.com info@eastey.com

