

 **First** in Quality. Built to **Last**.

L-SEALERS

PROFESSIONAL SERIES

DURABILITY THAT CAN'T BE MATCHED

EASTEY's Professional Series L-Sealers provide top of the line features and the most robust L-Sealer design on the market today. Expertly welded from 1/4" cold rolled steel, EASTEY Professional L-Sealers will withstand even the most abusive real world sealing applications. As a measure of strength, EASTEY L-Sealers weigh nearly twice as much as competitive models.

PROVEN RELIABILITY FOR YOUR NEEDS

EasteY L-Sealers are designed and built to give you all the performance features needed for positive sealing a wide variety of films including polyolefin, polyethylene, and PVC. Cast seal arms, stainless steel film clamps, and heavy-duty magnet clamping are just some of the features that provide the durability you have come to rely on from EASTEY. See for yourself why EASTEY has been a leader in the shrink packaging industry for over 25 years.

STANDARD FEATURES

- Designed to seal most polyolefin, polyethylene, and PVC shrink films
- All-welded main frame from 1/4" cold rolled steel
- Built-in drawer for tools or spare parts
- Seal head casting equipped with head return cylinder
- Stainless steel film clamps hold film in place while sealing
- Utilizes durable and low maintenance hot knife seal system
- Hot knife seal systems available with mushroom (standard), pancake, or arrow inserts

EVERLASTING SEMI-AUTOMATIC L-SEALING

EASTEY Professional Series L-Sealers are the ultimate workhorse for your most abusive sealing applications.

STANDARD FEATURES (cont.)



- Dual locking magnet clamps apply even pressure across sealbar
- Adjustable dwell time for better seal control
- Solid state temperature control adjustable for a variety of films*
- Adjustable product tray accommodates wide variety of product sizes
- Takeaway conveyor can be raised or lowered to center-seal product
- Automatic takeaway conveyor
- Heavy duty film cradle allows for easy changeovers and adjustments
- Adjustable pin perforator provides air evacuation
- Side seal size from 20" - 50"; front seal size from 16" - 100"
- Maximum film width up to 44"
- Maximum film roll OD up to 12"; 10" with power unwind
- Custom two-part epoxy finish resists scratching
- Heavy duty casters for transportation within plant
- Available in 110v, 220v, or optional 480v
- Easy to use design requires minimal training and maintenance
- Made in the USA

OPTIONS


- Additional Pin Perforator Wheel
- Additional 2" Seal Bar Length Extension - front or side
- Variable Speed Takeaway Conveyors
- Lowered Conveyor - additional 2" to allow for 4" additional product height
- Conveyor Assist - for transferring heavy products
- Product Tray - Custom size, stainless finish, UHMW, or gravity roller
- Product Assist with photoeye
- UL approved electronics and control box
- Left hand machines available
- Custom sizes and configurations available upon request

**Ask Us About Custom Equipment*

STANDARD FEATURES

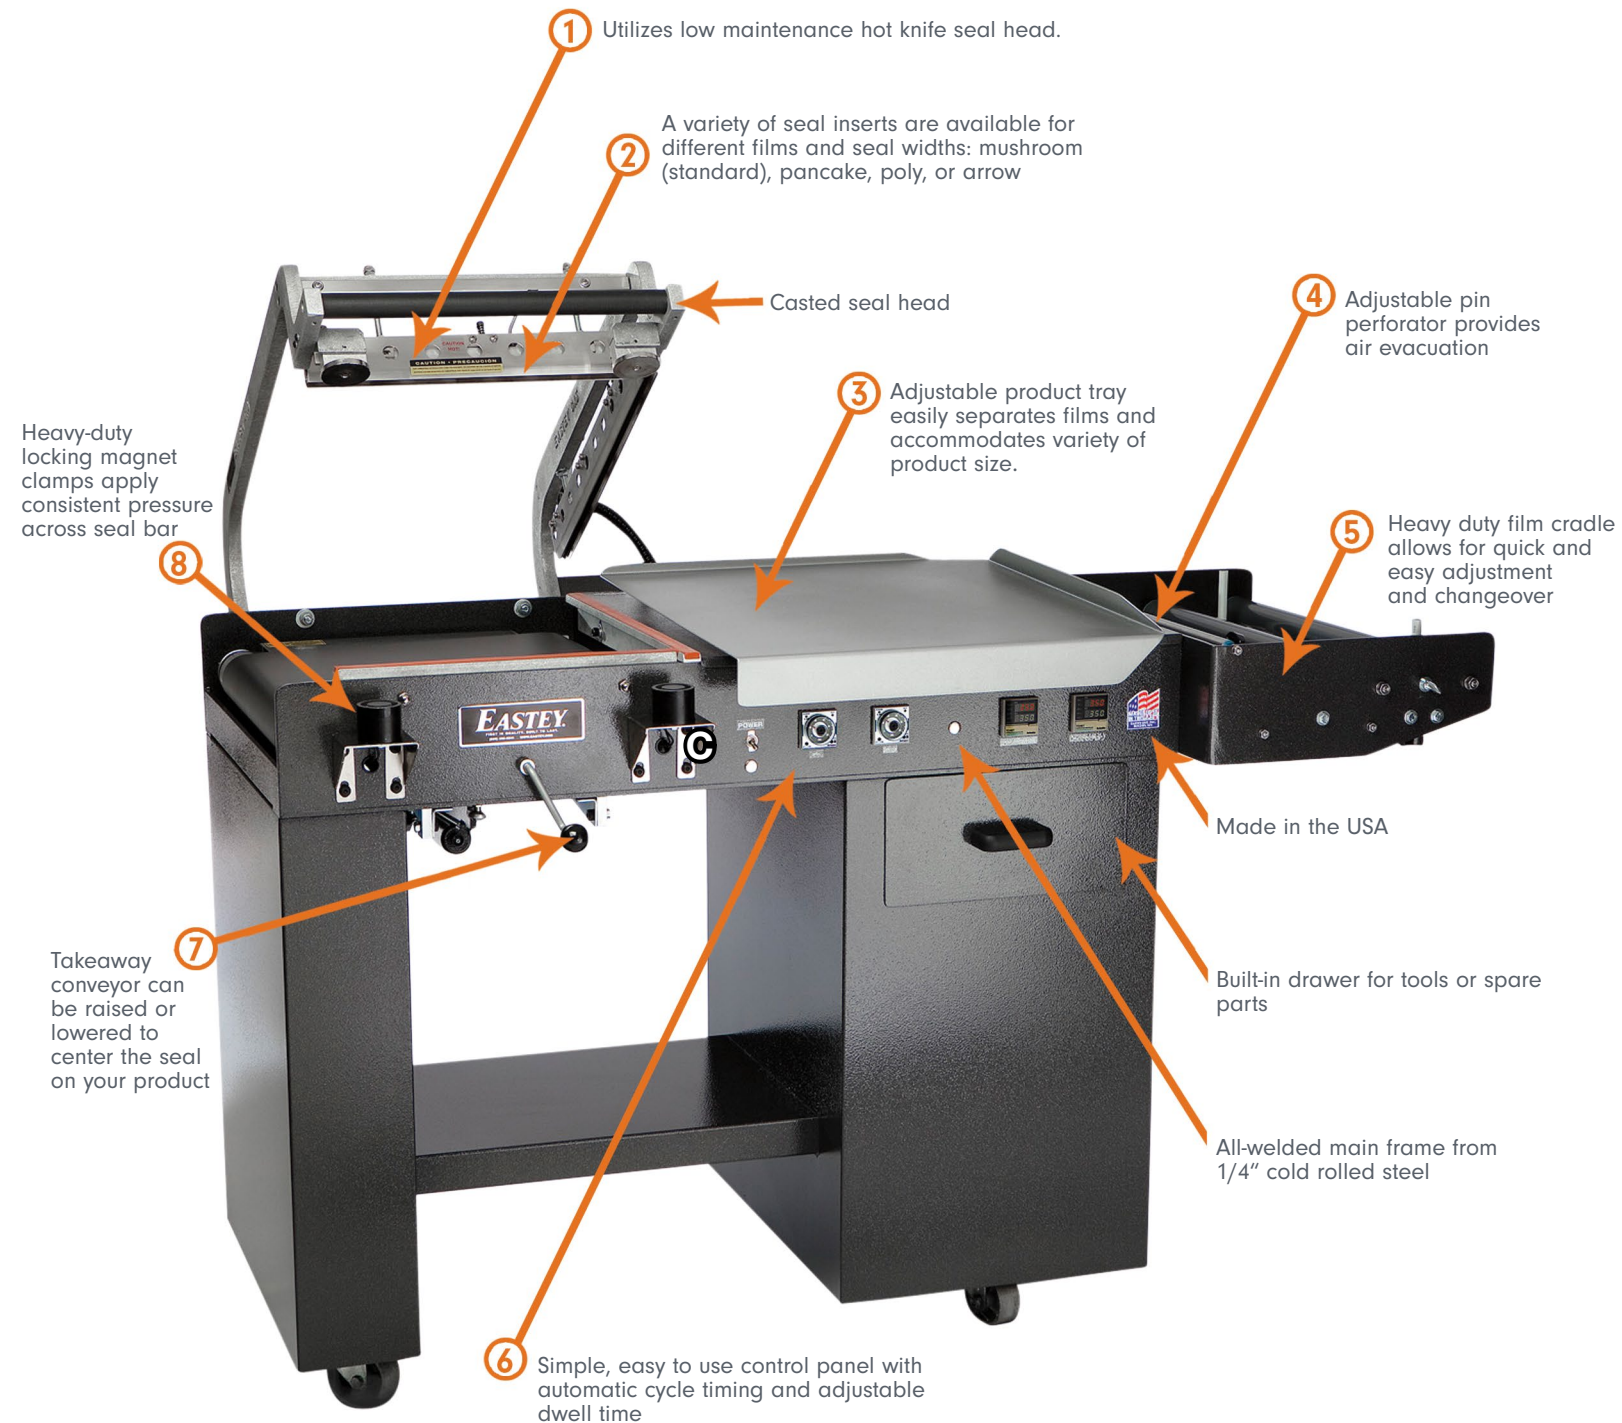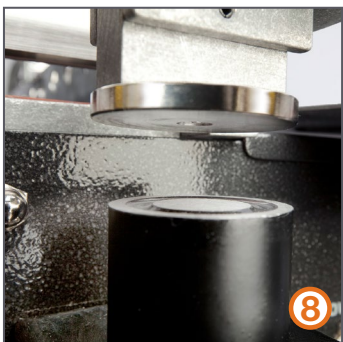

OPTIONAL ACCESSORIES

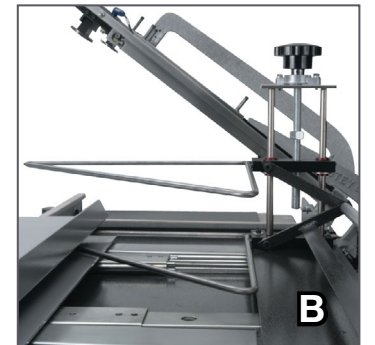

A Power film unwind
Allows free feeding of film increasing operator efficiency.

B Film Inverter
Inverting head allows the film to come off the back of machine. This pre-opens the film and minimizes operator effort which in turn increases output.

C Hot Knife Inserts
Hot knife seal inserts available for different films and seal widths: mushroom (standard), pancake, poly, or arrow.

- Additional Pin Perforator Wheel
- Additional 2" Seal Bar Length Extension - front or side
- Variable Speed Takeaway Conveyors
- Lowered Conveyor - additional 2" to allow for 4" additional product height
- Conveyor Assist - for transferring heavy products
- Product Tray - Custom size, stainless finish, UHMW, or gravity roller
- Product Assist with photoeye
- UL approved electronics and control box
- Left hand machines available
- Custom sizes and configurations available upon request

L-SEALERS

PROFESSIONAL SERIES

L-SEALERS PROFESSIONAL SERIES

MODEL NUMBER	SEAL DIMENSIONS		MACHINE DIMENSIONS			STANDARD POWER			WEIGHT	SHP WT.
	FRONT	SIDE	WIDTH	HEIGHT	LENGTH	VOLTS	AMPS	PHASE		
EM2016TK	16"	20"	34"	44"	63"	220/110	10/20	1	600 lbs	700 lbs
	41 cm	51 cm	86 cm	112 cm	160 cm				272 kg	317 kg
EM2028TK	28"	20"	34"	44"	84"	220/110	10/20	1	700 lbs	800 lbs
	71 cm	51 cm	86 cm	112 cm	213 cm				317 kg	362 kg
EM2040TK	40"	20"	34"	44"	106"	220	15	1	800 lbs	900 lbs
	102 cm	51 cm	86 cm	112 cm	269 cm				362 kg	408 kg
EM2050TK	50"	20"	34"	44"	126"	220	20	1	900 lbs	1000 lbs
	127 cm	51 cm	86 cm	112 cm	320 cm				408 kg	453 kg
EM2070TK	70"	20"	34"	44"	167"	220	25	1	1300 lbs	1400 lbs
	178 cm	51 cm	86.36	112 cm	424 cm				589 kg	635 kg
EM2080TK	80"	20"	34"	44"	187"	220	20	1	1500 lbs	1600 lbs
	203 cm	50 cm	86 cm	112 cm	474 cm				680 kg	725 kg
EM20100TK	100"	20"	34"	44"	227"	220	20	1	1900 lbs	2000 lbs
	254 cm	50 cm	86 cm	112 cm	577 cm				861 kg	907 kg
EM3040TK	40"	30"	43"	44"	106"	220	20	1	1200 lbs	1300 lbs
	101.60	76.20	109 cm	112 cm	269 cm				544 kg	591 kg
EM3050TTK	50"	30"	43"	44"	126"	220	20	1	1300 lbs	1400 lbs
	127 cm	76 cm	109 cm	112 cm	320.04				591 kg	637 kg
EM3070TK	70"	30"	43"	44"	167"	220	25	1	1600 lbs	1700 lbs
	177 cm	76 cm	109 cm	112 cm	424 cm				728 kg	774 kg
EM3080TK	80"	30"	43"	44"	187"	220	25	1	1800 lbs	1900 lbs
	203 cm	76 cm	109 cm	112 cm	474 cm				819 kg	861 kg
EM30100TK	100"	30"	43"	44"	227"	220	25	1	2100 lbs	2200 lbs
	254 cm	76 cm	109 cm	112 cm	577 cm				956 kg	997 kg
EM4040TK*	40"	40"	53"	44"	106"	220	20	1	1700 lbs	1800 lbs
	101 cm	101 cm	135 cm	112 cm	269 cm				774 kg	819 kg
EM4050TK*	50"	40"	53"	44"	126"	220	20	1	1900 lbs	2000 lbs
	127 cm	101 cm	135 cm	112 cm	320 cm				861 kg	907 kg
EM4070TK*	70"	40"	53"	44"	167"	220	25	1	2100 lbs	2200 lbs
	177 cm	101 cm	135 cm	112 cm	424 cm				956 kg	997 kg
EM4080TK*	80"	40"	53"	44"	187"	220	25	1	2300 lbs	2400 lbs
	203 cm	101 cm	135 cm	112 cm	474 cm				1043 kg	1092 kg
EM40100TK*	100"	40"	53"	44"	227"	220	25	1	2600 lbs	2700 lbs
	254 cm	101 cm	135 cm	112 cm	577 cm				1179 kg	1229 kg
EM5050TK*	50"	50"	63"	44"	126"	220	20	1	1900 lbs	2000 lbs
	127 cm	127 cm	160 cm	112 cm	320 cm				861 kg	907 kg
EM5070TK*	70"	50"	63"	44"	167"	220	25	1	2100 lbs	2200 lbs
	177 cm	127 cm	160 cm	112 cm	424 cm				956 kg	997 kg
EM5080TK*	80"	50"	63"	44"	187"	220	25	1	2300 lbs	2400 lbs
	203 cm	127 cm	160 cm	112 cm	474 cm				1043 kg	1092 kg
EM50100TK*	100	50"	63"	44"	227"	220	25	1	2600 lbs	2700 lbs
	254.00	127 cm	160 cm	112 cm	577 cm				1179 kg	1229 kg

* Powered film unwind included



7041 Boone Avenue North, Brooklyn Park, MN 55428
 (763) 428-4846 1 (800) 835-9344
 www.easty.com info@easty.com



ENGAGE technologies corporation

020823 Rev B